

TOYO HORIZONTAL SAND PUMP (ONSHORE)

HVH

FEATURE

- Mechanical Seal is installed and no leakage of water from sealing section to the outside.
- Onshore pump of simple construction and high durability against abrasion.
- The distance between Suction Cover and Impeller is easily adjustable and it allows best operation anytime.



DISCHARGE BORE	100~150mm
OUTPUT	11~37kw
SOLID SIZE	60~80mm

SPECIFICATION


MODEL	BORE		PUMP			MOTOR		WEIGHT (kg)
	SUCTION (mm)	DISCHARGE (mm)	HEAD (m)	CAPACITY (m ³ /min)	SOLID SIZE (mm)	OUTPUT (kW)	POLE (P)	
HVH-15	100	100	15	1.2	60	11	4	394
HVH-15B	150	150	10	2.5	60	11	4	384
HVH-20	100	100	20	1.2	60	15	4	414
HVH-20B	150	150	15	2.5	60	15	4	404
HVH-30	100	100	26	1.2	70	22	4	551
HVH-30B	150	150	20	2.5	80	30	4	541
HVH-40B	150	150	20	3.2	80	30	4	577
HVH-40BK *	150	150	25	3.5	70	30	4	567
HVH-4-50 *	150	150	25	2.5	70	37	4	770
HVH-50	150	150	25	3.25	80	37	6	1057

- Specifications are changeable without notice. Please ask for Specification Sheet for the details.
- * only 60Hz available.

SIZE

Unit : mm

MODEL	A	B	C1	C2	D
HVH-15	832	1468	728	-	612
HVH-15B	832	1468	-	575	612
HVH-20	832	1512	728	-	612
HVH-20B	832	1512	-	575	612
HVH-30	873	1572	843	-	667
HVH-30B	873	1572	843	690	667
HVH-40B	873	1614	-	690	667
HVH-40BK *	848	1585	-	665	667
HVH-4-50 *	1049	1927	-	755	682
HVH-50	1262	2146	-	910	826

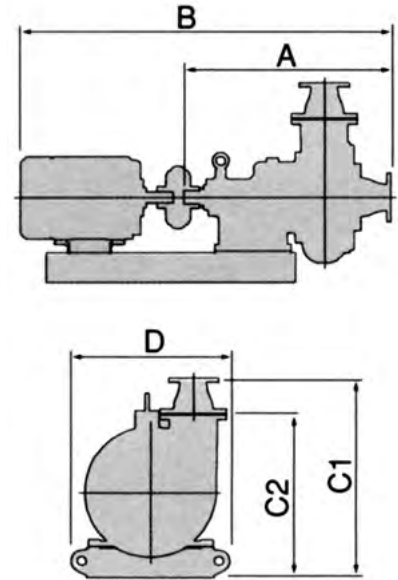

● Specifications are changeable without notice. Please ask for Specification Sheet for the details.

PERFORMANCE CURVES

