

TOYO SUBMERSIBLE MIXER

VHA

FEATURE

- TOYO submersible mixer mixes the slurry strongly by its jet stream and Cutter Fan (agitator). It has no need of installation, easy moving.
- Direction of mixing is changeable by the attachment. Also THAF is usable as a pump by closing two outlets.
- Mixer and motor is combined. Motor section is submerged and causes no noise.
- VHA is amphibious mixer. Usable in water or semi-submerged.



DISCHARGE BORE	40~125mm
OUTPUT	2.2~22kw

SPECIFICATION


MODEL	BORE (mm)		ROUGH GUIDE OF MIXING	SOLID SIZE (mm)	OUTPUT (kW)	POLE (P)	VOLTAGE (V)	STARTING	WEIGHT (kg)	CABTYRE CABLE LENGTH: 10m (Symbol x mm ² x core)
	NOZZLE	CASING								
VHA-3	40	80	8~12	25	2.2	4	200	DIRECT ON LINE	130	3PNCT×5.5 [#] ×4C
VHA-5	40	80	10~15	25	3.7	4	200	DIRECT ON LINE	140	3PNCT×5.5 [#] ×4C
VHA-7.5	80	100	14~21	30	5.5	4	200	DIRECT ON LINE	185	3PNCT×5.5 [#] ×4C
VHA-10	80	100	16~24	30	7.5	4	200	DIRECT ON LINE	200	3PNCT×8 [#] ×4C
VHA-15B	100	125	24~48	60	11	4	200	DIRECT ON LINE	330	3PNCT×8 [#] ×4C
VHA-20B	100	125	40~60	60	15	4	200	DIRECT ON LINE	350	3PNCT×14 [#] ×4C
VHA-30B	125	150	52~78	60	22	4	200	DIRECT ON LINE	450	3PNCT×38 [#] ×3C•3.5 [#] ×1C

● Specifications are changeable without notice. Please ask for Specification Sheet for the details.

SIZE

Unit : mm

MODEL	A	B	C
VHA-3	676	862	250
VHA-5	696	862	250
VHA-7.5	792	1054	350
VHA-10	846	1054	350
VHA-15B	995	1213	400
VHA-20B	1064	1213	400
VHA-30B	1252	1370	500

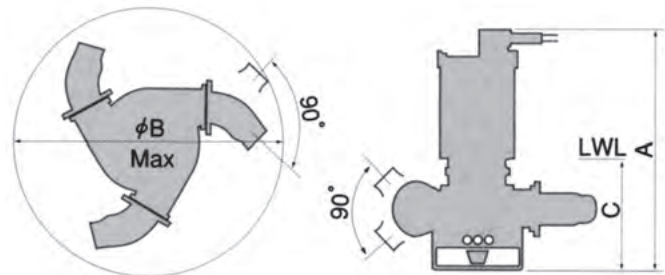

● Specifications are changeable without notice. Please ask for Specification Sheet for the details.