


TOYO SUBMERSIBLE JETTER

JM

FEATURE

- Direct drive and compact design. Easy installation and handling.
- Submersible type and without noise by operation.
- Extreme durability by high Chrome casting iron is used in propeller and SIC double mechanical seal.

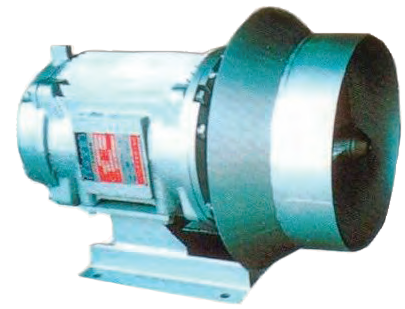

OUTPUT	0.75~7.5kw
--------	------------

SPECIFICATION


MODEL		MOTOR			REVOLUTION r/min	SPEED m/sec	CAPACITY m^3/min	WEIGHT (kg)	
		OUTPUT (kw)	POLE (P)	INSULATION				HORIZONTAL	VERTICAL
JM-1-3	*	0.75	4	B	1415	2.6	4.5	55	85
JM-1-3	*	0.75	4	B	1700	2.6	4.5	55	85
JM-2-2	*	1.5	6	F	960	2.6	8	90	128
JM-2-2	*	1.5	6	F	1147	2.3	7	90	128
JM-3-2	*	2.2	6	F	982	2.6	11	96	135
JM-3-2	*	2.2	6	F	1175	3.1	9	96	135
JM-5-2	*	3.7	6	F	973	2.6	14	116	150
JM-5-2	*	3.7	6	F	1165	2.6	14	116	150
JM-7.5-2	*	5.5	6	B	970	2.8	18	116	150
JM-7.5-2	*	5.5	6	B	1164	3.1	19	116	150
JM-10-2	*	7.5	8	B	718	2.8	26	200	260
JM-10-2	*	7.5	8	B	864	3.1	234	200	260

- Specifications are changeable without notice. Please ask for Specification Sheet for the details.
- * only 50Hz available.
- * only 60Hz available.

SIZE

Unit : mm

MODEL	A	B	C	D	E	F	G	H
JM-1-3	509	180	320	450	690	500	318	550
JM-2-2	603	220	400	500	874	600	377	500
JM-3-2	623	220	400	500	894	600	377	500
JM-5-2	633	240	400	500	885	650	399	550
JM-7.5-2	633	240	460/400	500	885	650	410/399	650
JM-10-2	761	350	600	850	1032	700	485	850

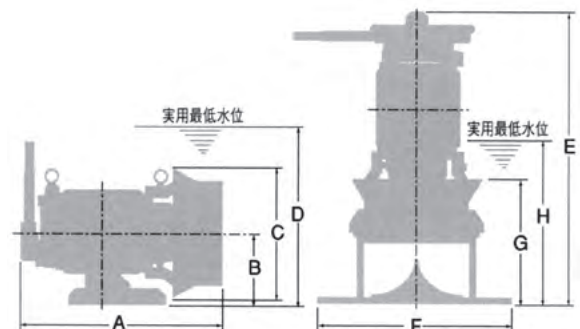

- Specifications are changeable without notice. Please ask for Specification Sheet for the details.