


## TOYO SUBMERSIBLE EXCAVATOR

# OPK (HYDRAULIC DRIVE)

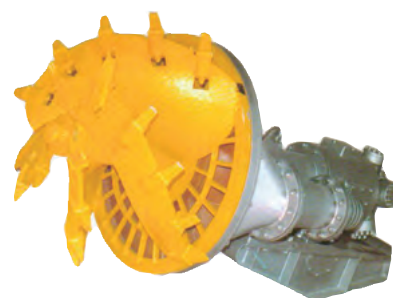

### FEATURE

- TOYO submersible excavator of hydraulic drive. The load or impact on the excavator shall be absorbed by oil and prevent damage of driving unit.
- Speed is freely changeable from 0 to 40rpm. Operation can be done at the best speed fit to the condition of the site.

VOLTAGE	140kg/cm <sup>2</sup>
---------	-----------------------

### SPECIFICATION

MODEL	BORE (mm)	HYDRAULIC MOTOR			REVOLUTION (r/min)	WEIGHT (kg)
		PRESSURE (kg/cm <sup>2</sup> )	TORQUE (kgm)	INFLOW (cc/rev)		
OPK-10K	150	140	154	745	0~40	600
OPK-20	200	140	240	1160	0~40	1400
OPK-30	250	140	410	1960	0~40	2300

- Specifications are changeable without notice. Please ask for Specification Sheet for the details.

### SIZE

MODEL	A	B	C
OPK-10K	1476	700	380
OPK-20	2153	800	700
OPK-30	2678	1200	760

- Specifications are changeable without notice. Please ask for Specification Sheet for the details.

