

TOYO AMPHIBIOUS MOTOR

TM(VH)


FEATURE

- Suitable to the water treatment in construction, factory and the other various purpose.
- Best for submersible pumps and submersible machines.



SPECIFICATION

MODEL	TM □ - □□ VH	
POLE	4P	6P
POLE	1.5kw~30kw	1.5kw~3.7kw
FREQUENCY	50Hz/60Hz	
VOLTAGE/PHASE	220V/200V·220V 3-PHASES	
INSULATION	CLASS-B	
RATING	CONTINUOUS - SUBMERGED	
STARTING	DIRECT ON LINE (Star-Delta is optional for over 11kw) Δ	
CABTYRE CABLE	3PNCT 10m	
PROTECTION	THERMAL PROTECTOR	THERMOSTAT(OPTIONAL)
INSTALLATION	BASE (HORIZONTAL)/FLANGE (VERTICAL)	
SEALING	OIL SEAL & RAREFLON SEAL / MECHANICAL SEAL	
PAINT COLOR	METALIC SILVER	
CONNECTION	MAKE TO ORDER	

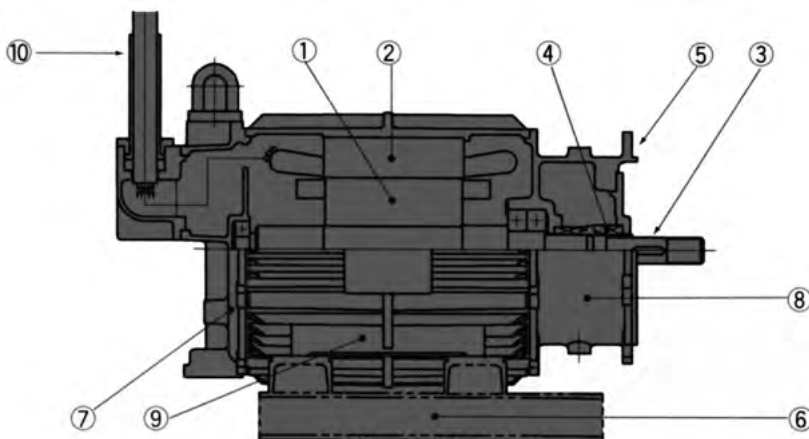

Name of Parts

1. Rotor
2. Stator
3. Shaft
4. Sealing Section
5. Flange
6. Base
7. Upper Cover
8. Under Cover
9. Motor Case
10. Cabtyre Cable